


TRAÇÃO

ALL-ROUND

FLOTAÇÃO

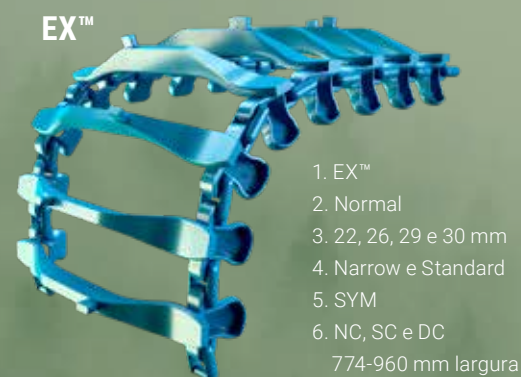


1. EX™
2. Normal
3. 22, 26, 29 e 30 mm
4. Narrow e Standard
5. SYM
6. NC, SC e DC

774-960 mm largura



TRAÇÃO FLOTAÇÃO NEVE

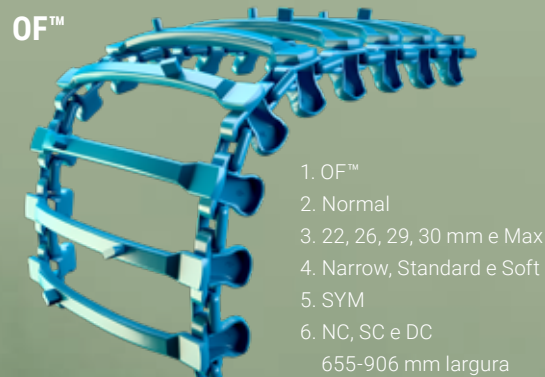


1. OF™
2. Normal
3. 22, 26, 29, 30 mm e Max
4. Narrow, Standard e Soft
5. SYM
6. NC, SC e DC

655-906 mm largura



TRAÇÃO FLOTAÇÃO NEVE

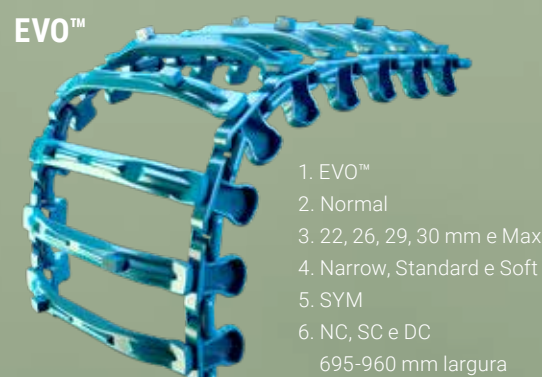

1. EVO™
2. Normal
3. 22, 26, 29, 30 mm e Max
4. Narrow, Standard e Soft
5. SYM
6. NC, SC e DC

695-960 mm largura



TRAÇÃO FLOTAÇÃO NEVE




1. ECO™
2. Normal
3. 22, 26, 29 e 30 mm
4. Narrow, Standard e Soft
5. SYM
6. NC, SC e DC

615-944 mm largura



TRAÇÃO FLOTAÇÃO NEVE

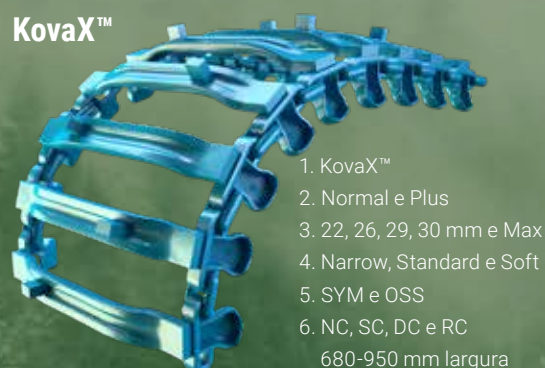


1. KovaX™
2. Normal e Plus
3. 22, 26, 29, 30 mm e Max
4. Narrow, Standard e Soft
5. SYM e OSS
6. NC, SC, DC e RC

680-950 mm largura



TRAÇÃO FLOTAÇÃO NEVE

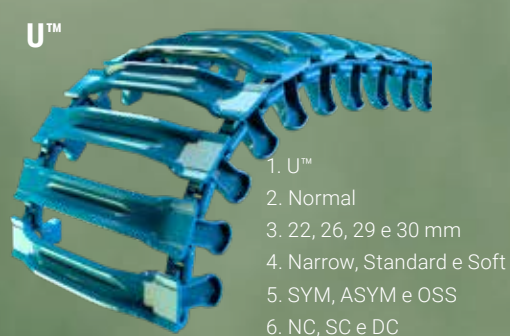

1. U™
2. Normal
3. 22, 26, 29 e 30 mm
4. Narrow, Standard e Soft
5. SYM, ASYM e OSS
6. NC, SC e DC

655-971 mm largura



TRAÇÃO FLOTAÇÃO NEVE



1. Baltic™
2. Light e Normal
3. 22, 26, 29 e 30 mm
4. Narrow, Standard e Soft
5. SYM, ASYM e OSS
6. NC, SC, DC e RC

650-1210 mm largura



TRAÇÃO FLOTAÇÃO NEVE



1. CoverB™
2. Light e Normal
3. 22, 26, 29 e 30 mm
4. Narrow, Standard e Soft
5. SYM, ASYM e OSS
6. NC, SC, DC e RC

670-1220 mm largura



TRAÇÃO FLOTAÇÃO NEVE



1. CoverX™
2. Light 150/180 e Normal 150/180
3. 22, 26, 29 e 30 mm
4. Narrow, Standard e Soft
5. SYM, ASYM e OSS
6. NC, SC e DC

670-1220 mm largura



TRAÇÃO FLOTAÇÃO NEVE

1. Membro transversal - Perfil



2. Tipo de membro transversal - Light, Normal e Plus

Cross member thicknesss, Light, Normal and Plus. Applicable for certain track types:


Light: Lighter cross members for forwarders with a load capacity up to 12 ton or harvesters with a machine weight up to 15 ton.

Normal: Standard size cross members for forwarders with a load capacity between 12-20 ton or harvesters with a machine weight up to 25 ton.

Plus: A stronger cross member for forwarders with a load capacity between 15-20 tons. For forwarders with payloads up to 25 tons, please consult with your Olofsfors dealer.

3. Sistema de ligação

22 – 26 – 29 – 30 e Max

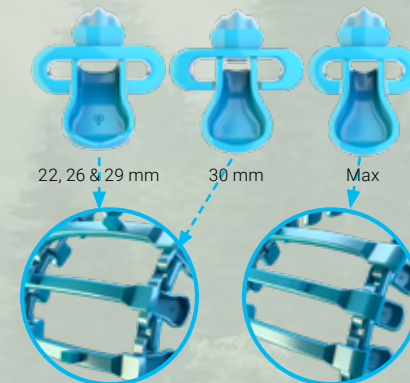

4. Versão




5. Posição



6. Trava

- NC = Sem trava
- SC = Trava única
- DC = Trava dupla
- RC = Trava de estrada

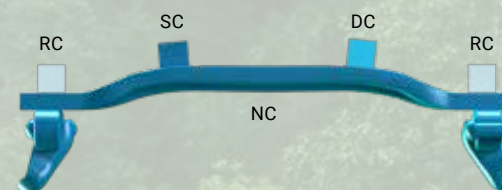

Combine track profiles – Bogie tracks with different cross-members on the same Track. Contact your local Olofsfors office to request other options and/or dimensions.